

GM3110

此款测试仪是一款便携式液晶数码显示的表面电阻测试仪；
测试范围为： $10^3-10^{12}\Omega$ ；可测量表面电阻值跟测量对地电阻；
携带方便，使用简单，可随时对所有导电型、防静电及静电泄
放材料的表面电阻进行测试。

NEW 新品

This tester is surface resistance tester a portable LCD digital display;
Test range: 10^3-10^{12} ohm; can measure the surface resistance value with
measurement of ground resistance;
Easy to carry, simple to use, may at any time to all conductive, antistatic
and electrostatic discharge Surface resistance put material test.


表面电阻	$10^3-10^{12}\Omega$
测量温度	0°C~50°C (32°F~122°F)
测量精度	电阻 $\pm 10\%$; 温度 $\pm 2^\circ\text{C}$ ($\pm 4^\circ\text{F}$)
测试反应时间	约1秒
数据锁定	✓
背光显示	✓
自动关机	✓
低电提示	✓
工作电压	9V
尺寸	63.6*35*125.8mm
重量	123g
电源	9V 6F22电池



GM3110



Surface Resistance	$10^3-10^{12}\Omega$
Temperature	0°C~50°C (32°F~122°F)
Measuring Precision	Resistance $\pm 10\%$; Temperature $\pm 2^\circ\text{C}$ ($\pm 4^\circ\text{F}$)
Response Time	About 1S
Data Hold	✓
Backlight	✓
Auto Power Off	✓
Low Battery Alert	✓
Operating Voltage	9V
Unit Size	63.6*35*125.8mm
Weight	123g
Power	9V 6F22 Battery

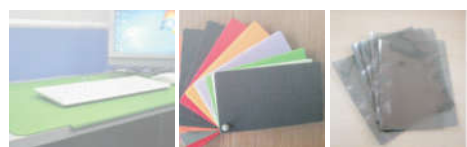

GM816 /GM816A /GM8908

使用大型液晶显示屏更易读取数据。重量轻操作简单，响应迅速，准确
测量各项气象参数。用在采暖、通风、空气调节、气象、农业、冷藏干燥、
劳动卫生调查等各方面，需要测定室内外或模型的气流速度时都可。

This product finds its wide application in the fields of heating,
ventilation, meteorology, agriculture, frozen storage, and featuring
large LCD for easy data reading.



NEW 新品

GM8908

GM816

GM816A

测量项目	风速/风温	
	风速:	
测量范围	0~30米/秒, 1.4~90千米/小时, 0~5860英尺/分,	
	0~55海里/小时, 0~65英里/小时(精确度: $\pm 5\%$)	
	风温: -10°C~45°C, 14°F~113°F(精确度: $\pm 2^\circ\text{C}$)	
分辨率	0.2°C, 0.2m/s	
冷冻提示	✓	
蒲福风力等级	✓	
°C/°F单位转换	✓	
低电压显示	✓	
自动关机	14分钟无任何操作自动关机	
LCD背光显示	✓	
最大值/平均值/当前值显示	✓	
产品尺寸	GM816: 40*18*105mm; GM8908: 58*20*104mm	
	GM816A: 52.5*35.5*160mm	
标准箱数量	GM816/GM8908: 80PCS; GM816A: 60PCS	
标准箱尺寸	GM816: 38*38*44cm; GM8908: 54.9*37.3*44.0cm	
	GM816A: 49.7*34.3*44.4cm	
标准箱毛重	GM816: 9.6kg; GM8908: 10.8kg; GM816A: 10.6kg	
电源	GM816/GM8908: CR2032 3.0V; GM816A: 6F22 9V	

Measurement Items	Air velocity, Air temperature
Measurement Range	Air velocity: 0~30m/s, 0~90km/h, 0~5860ft/min,
	0~55knots, 0~65mph ($\pm 5\%$)
Resolution	Air temperature: -10°C~45°C, 14°F~113°F ($\pm 2^\circ\text{C}$)
	0.2°C, 0.2m/s
Wind Chill	✓
Beaufort Scale Indication	✓
°C/°F Selection	✓
Low Battery Indication	✓
Auto Power Off	14 Minutes Without any Operation
Backlight	✓
MAX/AVG/Current Reading	✓
Unit Size	GM816: 40*18*105mm; GM8908: 58*20*104mm
	GM816A: 52.5*35.5*160mm
Standard Quantity Per Carton	GM816/GM8908: 80PCS; GM816A: 60PCS
Standard Carton Size	GM816: 38*38*44cm; GM8908: 54.9*37.3*44.0cm
	GM816A: 49.7*34.3*44.4cm
Standard Carton Gross Weigh	GM816: 9.6kg; GM8908: 10.8kg; GM816A: 10.6kg
Power	GM816/GM8908: CR2032 3.0V; GM816A: 6F22 9V