




- Laser
- Thermometer peobe
- Trigger
- Battery:9V 6F 22*1PCS(Not Included)
- Battery Cover




Distance(D) to Spot size(S)
D:S=12:1

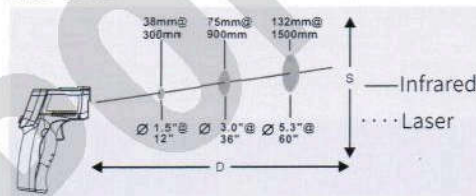

LCD display & buttons

1. LCD display:
 - a. Data hold icon
 - b. Scanning icon
 - c. Laser on icon
 - d. Back light on icon
 - e. Low Battery icon
 - f. Temperature unit
 - g. Temperature reading



Specification	
Temperature range	-50 ~ 450°C (-58 ~ 842°F)
Accuracy	0°C~450°C (32°F~842°F) : ±1.5°C(±2.7°F) or ±1.5%
Resolution	0.1°C or 0.1°F
Repeatability	1% of reading or 1°C
Response time	500 mSec, 95% response
Spectral response	5-14 um
Emissivity	0.95Preset
Distance to Spot size	12:1
Operating Temperature	0°C ~40°C (32°F ~ 104°F)
Operating Humidity	10%RH~95%RH non-condensing, up to 30°C(86°F)
Storage Temperature	-20°C ~ 60°C (-4°F~140°F)
Power	9V (6F22) battery
Typical battery life (Alkaline)	Non-laser mode: 22 hrs;Laser Models:12 hrs
Weight	147.5g
Dimension	153x101x43mm